



show lighting


216	LED
219	Laser
222	Stroboscope
223	Spotlights
223	Control consoles
224	Disco balls
225	Effects
226	Fog machines
225	Fog liquids
226	Bubble machine
227	Bubble liquid
208	Mounts
228	Bars
228	Hooks
229	Stands

LED. LED EFFECTS

4-beam LED light with 108 R, G and B LEDs with preprogrammed effects. DMX control through 5 channels, automatic mode and audio activation with adjustable sensitivity. Each beam can be controlled from a different channel or all together from one channel. Long-lasting and energy-saving.




LED-BEAM23

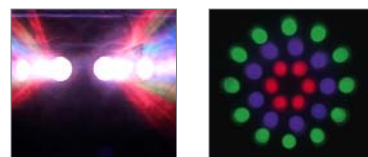

LED mushroom effect light with 54 x 5 mm LEDs. DMX control through 4 channels, automatic mode, audio activation or master/slave mode. Long-lasting and energy-saving.




LED-BEAM24

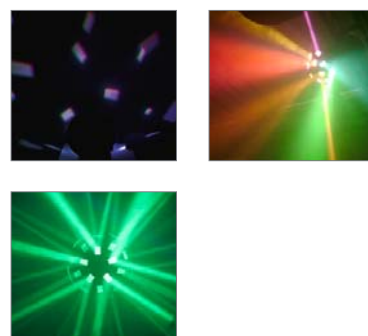

Flower effect projector with 18 x R, G and B LEDs with preprogrammed effects. Automatic mode or audio activation. Long-lasting and energy-saving.



LED-PROJECT40

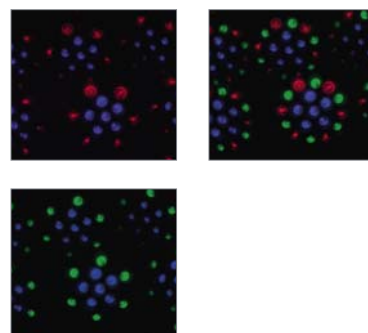

LED-BEAM23

LED-BEAM24


LED-PROJECT40

CHARACTERISTICS	4-beam LED light with preprogrammed effects. Automatic mode and audio activation with adjustable sensitivity. Colour, dimmer, strobe, speed variation and the output for each one of the beams through the DMX controller. Long-lasting LEDs up to 60 000 hours. Microphone incorporated.	Mushroom effect light with preprogrammed patterns. Automatic mode or audio activation with adjustable sensitivity or master/slave mode. Colour and dimmer adjustment using DMX controller. Long-lasting LEDs up to 100 000 hours.	Flower effect projector with preprogrammed effects. Automatic mode or audio activation with adjustable sensitivity. Strobe adjustment and motor rotation. Long-lasting LEDs up to 50 000 hours. Microphone incorporated.
LEDs	108 x 5 mm (R: 24, G: 48, B: 36)	54 x 5 mm (R: 18, G: 18, B: 18)	18 x 5 mm (R: 6, G: 6, B: 6)
DMX CHANNELS	5	4	-
INPUTS	DMX IN, XLR 3-pin female	DMX IN, 3-pin female XLR	-
OUTPUT	DMX OUT, 3-pin male XLR	DMX OUT, 3-pin male XLR	-
CONTROLS	Micro configuration switches Sensitivity adjustment	Micro switches for configuration Sensitivity adjustment	Automatic mode or audio activation Sensitivity adjustment
POWER SUPPLY	230 V AC, 90 mA	230 V AC, 20 W	230 V AC, 30 mA
DIMENSIONS	515 x 170 x 330 mm depth	280 mm Ø x 350 mm depth	155 x 100 x 210 mm depth
WEIGHT	5 kg	3.2 kg	1.5 kg
ACCESSORIES	Adjustable fixing mount	Adjustable fixing mount	Adjustable fixing mount

Laser ball with 1 x 3 W R,G and B LED with 32 mobile beams. DMX control through 6 channels, automatic mode with audio activation or master/slave mode. Long-lasting and energy-saving.




LED-BALL24

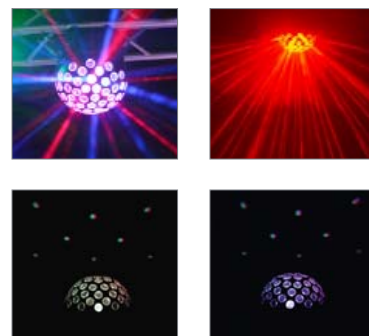

Mini laser ball with 3 x 3 W R, G and B LEDs with 82 mobile beams. DMX control through 5 channels, automatic mode, audio activation or master/slave mode. Long-lasting and energy-saving.




LED-MINIBALL20

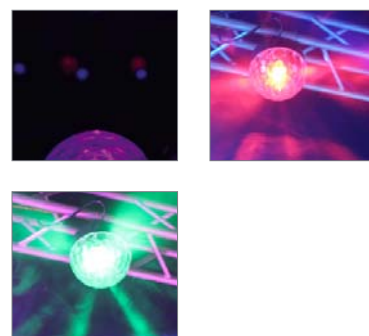

Mini LED ball with 6 x R, G, B, W, O and P LEDs, 3 W, with mobile beams. Automatic mode with audio activation. Long lasting and energy-saving.




LED-MINIBALL21

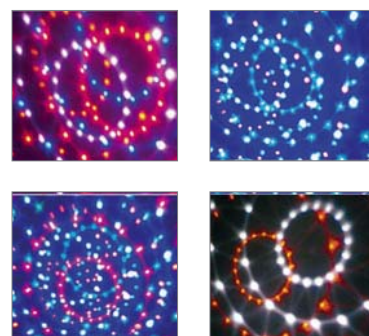

	LED-BALL24	LED-MINIBALL20	LED-MINIBALL21
CHARACTERISTICS	Ball with 32 mobile beams. Automatic mode with audio activation and master/slave mode. Colour, dimmer, strobe and motor rotation adjustment using DMX controller. Long-lasting LEDs up to 100 000 hours. Microphone incorporated.	Mini laser ball with 82 mobile beams. Automatic mode, audio activation or master/slave model. Colour, dimmer, strobe and motor rotation speed adjustment using DMX control. Long-lasting LEDs up to 100 000 hours. Microphone incorporated. Forced ventilation.	Mini ball with mobile beams. Automatic mode and audio activation. Long-lasting LED up to 100 000 hours. Microphone incorporated.
LED	1 x 3 W RGB	3 x 3 W (R: 1, G: 1, B: 1)	6 x 3 W (R: 1, G: 1, B: 1, W:1, O:1, P:1)
DMX CHANNELS	6	5	-
INPUTS	DMX IN, 3-pin female XLR	DMX IN, 3-pin female XLR	-
OUTPUTS	DMX OUT, 3-pin male XLR	DMX OUT, 3-pin male XLR	-
CONTROLS	Micro configuration switches	Configuration display	-
POWER SUPPLY	230 V AC, 75 mA	90-240 V AC, 60 mA	90-240 V AC, 20 W
DIMENSIONS	250 mm Ø x 260 mm height	180 mm Ø x 160 mm height	180 mm Ø x 160 mm height
WEIGHT	3.2 kg	0.7 kg	0.4 kg

LED. LED EFFECTS

Mini ball with 6 x R, G, B, W, O and P LED, 3 W. USB/SD/MP3 player with remote control and 2" speaker. Automatic mode with audio activation.

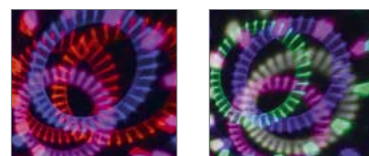

LED-MINIBALL06U

Mini LED ball with 3 x R, G, B LED, 1 W. Automatic mode. Compact and easy to install. E27 tip compatible with the majority of lamps. Long-lasting and energy-saving.




LED-MINIBALL27

Mini LED ball with 3 x R, G, B LED, 1 W. Automatic mode with audio activation. Compact and easy to install. E27 tip compatible with the majority of lamps. Long-lasting and energy-saving.



LED-MINIBALL28

Mini disc effect LED with 48 ultraluminous LED. Automatic mode with audio activation. Colour, strobe and animated sequence effects. Long-lasting and energy-saving.

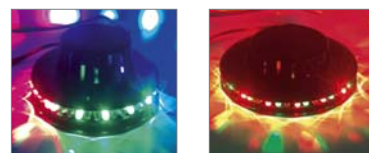

LED-WASHER10


	LED-MINIBALL06U	LED-MINIBALL27	LED-MINIBALL28	LED-WASHER10
CHARACTERISTICS	Mini ball with lighting network effect. USB/SD/MP3 player and 2" speaker. Lighting effect with automatic mode with audio activation. Long lasting LED up to 100 000 hours.	Mini LED ball with 3 x R, G, B LED, 1 W. Atmospheric effect, changing colours. E27 tip.	Mini LED ball with 3 x R, G, B LED, 1 W. Atmospheric effect. Audio activation. E27 tip.	Mini disc effect LED with 48 ultraluminous LED. Automatic mode with audio activation. Microphone incorporated.
LED	6 x 3 W (R: 1, G:1, B: 1, W: 1, O: 1, P: 1)	3 x 1 W (R:1, G:1, B:1)	3 x 1 W (R:1, G:1, B:1)	48 x 5 mm (R:16, G:16, B:16), 8 W total
POWER SUPPLY	110-230 V AC, 20 W	90-250 V AC	90-250 V AC	100-230 V AC
DIMENSIONS	180 mm Ø x 160 mm height	80 mm Ø x 135 mm height	80 mm Ø x 152 mm height	127 mm Ø x 38 mm height
WEIGHT	0.5 kg	0.1 kg	0.1 kg	0.1 kg
ACCESSORIES	Remote control for USB/SD/MP3 player	-	-	-

LASER


Mini kaleidoscope effect laser with 130 mW RG power and wide dispersion. Automatic mode and audio activation. Strobe and motor rotation speed adjustment. For assembly on wall, ceiling or surface.



LS-MATRIX01

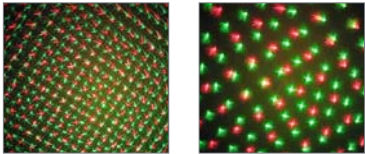

LS-MATRIX02

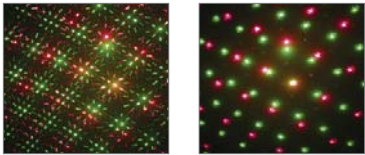

LS-MATRIX01


CHARACTERISTICS	Mini kaleidoscope effect laser 130 mW RG Automatic mode or audio activation. Strobe and motor rotation speed adjustment. Microphone incorporated. Forced ventilation.
POWER	130 mW RG R (650 nm): 100 mW G (532 nm): 30 mW
CONTROLS	Motor: rotation speed Strobe: speed and activation Automatic mode or audio activation
POWER SUPPLY	5.4 V DC, 150 mA with adapter included
DIMENSIONS	92 x 50 x 125 mm depth
WEIGHT	0.5 kg
ACCESSORIES	Tripod Adjustable fixing mount

LS-MATRIX02


CHARACTERISTICS	Mini kaleidoscope effect laser 130 mW RG Automatic mode or audio activation. Strobe and motor rotation speed adjustment. Microphone incorporated. Forced ventilation.
POWER	130 mW RG R (650 nm): 100 mW G (532 nm): 30 mW
CONTROLS	Motor: rotation speed Strobe: speed and activation Automatic mode or audio activation
POWER SUPPLY	5 V DC, 1 A with adapter included
DIMENSIONS	90 x 50 x 125 mm depth
WEIGHT	0.4 kg
ACCESSORIES	Tripod Adjustable fixing mount

LASER

Mini RG laser, 130 mW power, with remote control and wide dispersion. Geometric shapes and kaleidoscope effect. Automatic mode and audio activation. Strobe, colour and motor rotation speed adjustment using remote control. Wall, ceiling or surface assembly.

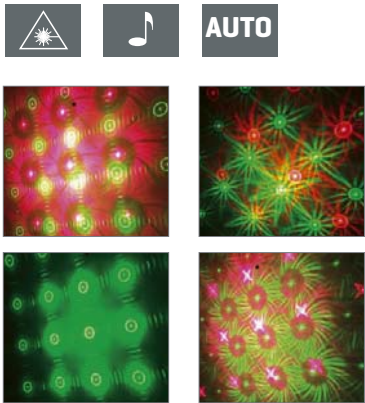

LS-MATRIX30

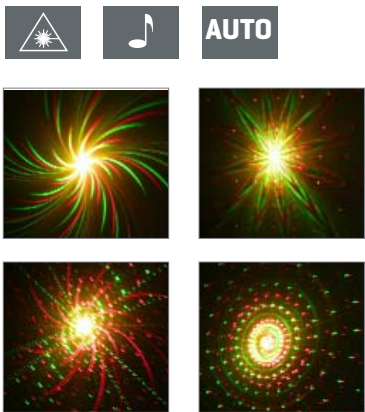

LS-MATRIX31

LS-MATRIX30

CHARACTERISTICS	Mini laser RG 130 mW with remote control. Geometrical shapes (stars, spirals, flowers and circles) and kaleidoscope effect. Automatic mode or audio activation. Microphone incorporated. Forced ventilation.
POWER	130 mW RG R (650 nm): 100 mW G (532 nm): 30 mW
CONTROLS	Automatic mode or audio activation Remote control (standby, mode (auto, sound) and color)
POWER SUPPLY	5 V DC, 1A with adapter included
DIMENSIONS	90 x 50 x 125 mm depth
WEIGHT	0.4 kg
ACCESSORIES	Tripod Adjustable fixing mount Remote control

LS-MATRIX31 **N!**


CHARACTERISTICS	Mini laser RG 130 mW with remote control. Geometrical shapes (stars, spirals, flowers and circles) and kaleidoscope effect. Automatic mode or audio activation. Strobe and motor rotation speed adjustment. Microphone incorporated. Forced ventilation.
POWER	130 mW RG R (650 nm): 100 mW G (532 nm): 30 mW
CONTROLS	Motor: rotation speed Strobe: speed and activation Automatic mode or audio activation Remote control (mode, strobe, speed and standby)
POWER SUPPLY	5 V DC, 1 A with adapter included
DIMENSIONS	90 x 50 x 125 mm depth
WEIGHT	0.4 kg
ACCESSORIES	Tripod Adjustable fixing mount Remote control

Mini RG laser with 130 mW power and wide dispersion with 58 moving patterns, effects and set figures. Audio activation with adjustable sensitivity and automatic mode. Laser output colour selector. For assembly on walls, ceilings or surfaces.



LS-PATTERN04

CHARACTERISTICS	Mini RG laser 130 mW. 58 moving patterns, effects and set figures. Automatic mode or audio activation with adjustable sensitivity. Laser output colour selector. High precision N1.8 motor. Microphone incorporated. Forced ventilation.
POWER	130 mW RG R (650 nm): 100 mW G (532 nm): 30 mW
CONTROLS	Automatic mode or audio activation Sensitivity adjustment Laser output colour selector
POWER SUPPLY	12 V DC, 2 A with adapter included
DIMENSIONS	120 x 65 x 140 mm depth
WEIGHT	1.1 kg
ACCESSORIES	Tripod Adjustable fixing mount

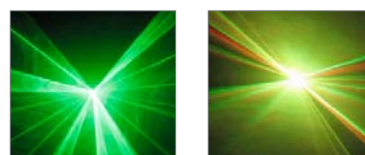

RG Laser star projector with 140 mW power with 3 W R, G and B LED background, and wide dispersion. 7-channel DMX control, automatic mode or audio activation with adjustable sensitivity. For assembly on walls, ceilings or surfaces.



LS-STARS07

CHARACTERISTICS	RG Laser star projector with 140 mW power and 3 W R, G and B LED background. Automatic mode or audio activation with adjustable sensitivity. Colour, dimmer, strobe, speed and motor rotation direction adjustment using the DMX control. High precision N1.8 motor. Microphone incorporated. Forced ventilation.
POWER	Laser: 140 mW RG R (650 nm): 100 mW G (532 nm): 40 mW
LEDs	LED background: 3 x 1 W (R:1, G:1, B:1)
DMX CHANNELS	7
INPUTS	DMX IN, 3-pin female XLR
OUTPUTS	DMX OUT, 3-pin male XLR
CONTROLS	Micro configuration switches Sensitivity adjustment
POWER SUPPLY	230 V AC, 250 mA
DIMENSIONS	192 x 100 x 220 mm depth
WEIGHT	2.5 kg
ACCESSORIES	Adjustable fixing mount



STROBOSCOPE

Stroboscope with 75 W energy saving xenon flash lamp with large reflector.
Automatic mode with adjustable strobe and master/slave mode.



AUTO

STROBE-60

CHARACTERISTICS	75 W stroboscope. Automatic mode, remote activation using 6.3 mm stereo jack connector and master/slave mode. Strobe adjustment.
LAMP	75 W Xenon flash
INPUTS	IN, 6.3 mm stereo jack
OUTPUTS	OUT, 6.3 mm stereo jack
CONTROLS	Strobe adjustment
POWER SUPPLY	230 V AC, 330 mA
DIMENSIONS	200 mm Ø x 235 mm depth
WEIGHT	1.3 kg
ACCESSORIES	Adjustable fixing mount

Professional stroboscope with 1500 W Xenon flash lamp.
DMX control through 2 channels, automatic mode with adjustable dimmer and strobes.



AUTO



STROBE-65

CHARACTERISTICS	1500 W DMX stroboscope Automatic mode. Dimmer and strobe adjustment using the DMX controller. Safety glass and aluminium frame.
LAMP	1500 W Xenon flash lamp
DMX CHANNELS	2
INPUTS	DMX IN, 3-pin female XLR
OUTPUTS	DMX OUT, 3-pin male XLR
CONTROLS	Micro configuration switches Dimmer and strobe adjustment
POWER SUPPLY	230 V AC, 10 A
DIMENSIONS	455 x 190 x 125 mm depth
WEIGHT	2.8 kg
ACCESSORIES	Adjustable fixing mounts



Mini LED stroboscope. Automatic mode with adjustable strobe.



LED-STROBE24

CHARACTERISTICS	Mini LED stroboscope. Automatic mode with adjustable strobe. Compact size.
LED	24 x 5 mm (W: 24)
CONTROLS	Strobe adjustment
POWER SUPPLY	230 V AC, 2 W
DIMENSIONS	100 x 52 x 142 mm depth
WEIGHT	0.2 kg
ACCESSORIES	Adjustable fixing mount

SPOTLIGHTS. PAR

FONESTAR


PAR 64 spotlight with 177 R, G and B LEDs. DMX control using 7 channels, automatic mode, audio activation or master/slave mode.

Long-lasting and energy saving.



LED-PAR70

CHARACTERISTICS	RGB PAR 64 spotlight. Automatic mode, audio activation and master/slave mode. Colour, dimmer, strobe adjustment and adjustable speed variation using DMX control. Long-lasting LEDs up to 50 000 hours. Microphone incorporated.
LEDs	177 x 10 mm (R: 60, G: 57, B: 60)
DMX CHANNELS	7
INPUTS	DMX IN, 3-pin female XLR
OUTPUTS	DMX OUT, 3-pin male XLR
CONTROLS	Configuration display
POWER SUPPLY	100-240 V AC, 100 mA
DIMENSIONS	210 mm Ø x 260 mm depth
WEIGHT	1.4 kg
ACCESSORIES	Adjustable fixing mount



CONTROL CONSOLE. DMX

192-channel DMX 512 lighting control console. For controlling lighting equipment connected in the same line, with 12 accesses for up to 16 channels. It has 6 chase memories with 184 programmable scenes each, shared between 23 memory banks with 8 scenes each. Manual, automatic, MIDI control or activation through audio thanks to the microphone incorporated.

For controlling and programming lighting for shows efficiently and quickly in clubs, bars, discos and shows.



DMX-80

CHARACTERISTICS	192-channel DMX 512 lighting control console. 12 accesses for up to 16 channels. 8 sliding controls assignable to channels 1-8 or 9-16 for each access. 6 chase memories with 184 programmable scenes in each one. 184 scenes shared among 23 memory banks of 8 scenes each. Automatic programmable sequence controlled by speed and time faders. Manual, automatic, MIDI control or activation through audio thanks to the microphone incorporated. Blackout function.
INPUTS	MIDI in, DIN 5
OUTPUTS	DMX OUT, 3-pin male XLR
POWER SUPPLY	9 V DC, 500 mA with adapter included
DIMENSIONS	483 x 133 x 82 mm depth. 3 U 19" rack
WEIGHT	2 kg
ACCESSORIES	USB LED lamp

DISCO BALLS.

Disco balls with motor. Specially designed for show lighting in nightclubs, bars, discos and on stages.




	MIRROR-20	MIRROR-25	MIRROR-30 NI	MIRROR-50
CHARACTERISTICS	Disco ball. EPS core. Motor and chain.	Disco ball. EPS core. Motor and chain.	Disco ball. ABS core. Motor and chain. Power cable with schuko connector.	Disco ball. ABS core. Motor and chain. Power cable with schuko connector.
MOUNT	For attaching motor to ceiling Motor speed 1 r.p.m. 1m chain	For attaching motor to ceiling Motor speed 2.5 r.p.m. 1m chain	For attaching motor to ceiling Motor speed 1 r.p.m. 1m chain	Attachment for motor to ceiling Motor speed 0.8 r.p.m. 1m chain
POWER SUPPLY	230 V AC, 4 W	230 V AC, 4 W	230 V AC, 3 W	230 V AC, 7 W
DIMENSIONS	20 cm Ø Mirrors 1.2 x 1.2 cm	25 cm Ø Mirrors 1.2 x 1.2 cm	30 cm Ø Mirrors 1.2 x 1.2 cm	50 cm Ø Mirrors 1.5 x 1.5 cm
WEIGHT	0.7 kg	0.9 kg	1.9 kg	7.9 kg

EFFECTS. BUBBLE MACHINE

Bubble machine. Constant bubble production.

FONESTAR

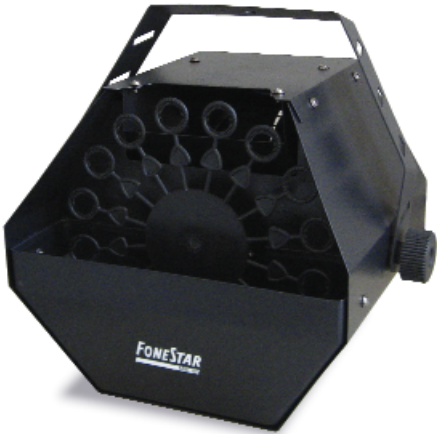

MB-50

CHARACTERISTICS	Bubble machine. 50 W power. Constant and elevated bubble production through a fan.
DEPOSIT CAPACITY	0.75 litres
POWER SUPPLY	230 V AC, 50 W
DIMENSIONS	235 x 210 x 220 mm depth
WEIGHT	1.9 kg
ACCESSORIES	Adjustable fixing mount

Liquid for bubble machine.



BUBBLE-LIQUID5

CHARACTERISTICS	5 litre bottle of liquid for bubble machine. Odourless, nontoxic, noninflammable and safe liquid.
-----------------	--

EFFECTS. FOG MACHINES

Professional fog machines. Constant output volume. Activation using remote control or cable.



FOG-4

CHARACTERISTICS	Professional fog machine. 400 W power. RF remote control. Constant output volume. Warm-up time: 5 minutes. Automatic thermostat. Activation using remote control or cable.
-----------------	--

INPUTS	Remote cable, XLR
DEPOSIT CAPACITY	0.3 litres
BLAST RANGE	4 m
OUTPUT VOLUME	100 m3/min
POWER SUPPLY	230 V AC, 400 W
DIMENSIONS	110 x 115 x 280 mm depth
WEIGHT	1.5 kg
ACCESSORIES	Adjustable fixing mount 3 m remote cable RF remote control



FOG-11 **N!**

CHARACTERISTICS	Professional fog machine. 700 W power. RF remote control. Warm-up time: 5 minutes. LED indicator for optimum operating temperature. Automatic thermostat. Activation using remote control, remote cable or push button on the back panel.
-----------------	---

INPUTS	Remote cable, DIN 5
DEPOSIT CAPACITY	1 litre
BLAST RANGE	7 m
OUTPUT VOLUME	170 m3/min
POWER SUPPLY	230 V AC, 700 W
DIMENSIONS	195 x 133 x 260 mm depth
WEIGHT	2.7 kg
ACCESSORIES	Adjustable fixing mount 3 m remote cable RF remote control

Professional fog machines. Power controlled using remote control or DMX control console. Fog intensity adjustment through DMX control console.



FOG-15

CHARACTERISTICS	Professional fog machine. 1500 W power. RF remote control. Warm-up time: 5 minutes. LED indicator for optimum operating temperature. Automatic thermostat. Power on using remote control or DMX control console. Fog intensity adjustment through DMX control console.	Professional fog machine. 1500 W power. RF remote control. Warm-up time: 8 minutes. LED indicator for optimum operating temperature. Automatic thermostat. Activation using remote control, cable or DMX control console. Fog intensity regulated using DMX control console.
INPUTS	DMX IN, male 3-pin XLR	DMX IN, 3-pin male XLR
OUTPUTS	DMX OUT, female 3-pin XLR	DMX OUT, 3-pin female XLR
DEPOSIT CAPACITY	2 litres	2.5 litres
BLAST RANGE	10 m	10 m
OUTPUT VOLUME	550 m3/min	580 m3/min
POWER SUPPLY	230 V AC, 1.500 W	230 V AC, 1 500 W
DIMENSIONS	255 x 220 x 465 mm depth	265 x 190 x 470 mm depth
WEIGHT	5.6 kg	6.6 kg
ACCESSORIES	Adjustable fixing mount XLR cable, 4 m RF remote control	Adjustable fixing mount 3 m remote cable RF remote control



FOG-16

EFFECTS. FOG LIQUIDS

Liquids for fog machine.

FOG-LIQUID15

CHARACTERISTICS	5 litre bottle of liquid for fog machine. Medium density and long-lasting. Odourless, nontoxic, nonflammable and safe liquid.
-----------------	---

FOG-LIQUID16

CHARACTERISTICS	5 litre bottle of liquid for fog machine. High density and long-lasting. Odourless, nontoxic, nonflammable and safe liquid.
-----------------	---



MOUNTS. BARS

Horizontal T bar for lights with 6 wing nuts.



T-6

CHARACTERISTICS	1.5 m horizontal T bar with 6 wing nuts. 35 mm hole. 23 cm between wing nuts. Manufactured in iron, black finish.
MAXIMUM BORNE WEIGHT	60 kg
DIMENSIONS	150 x 12 x 3 cm depth
WEIGHT	2 kg
ACCESSORIES	Bolts for fixing lights

MOUNTS. HOOKS

Lighting hook for 60 mm bar, maximum.



HK-60

CHARACTERISTICS	Lighting hook to be used with a 60 mm Ø bar maximum. Manufactured in iron, black finish.
MAXIMUM BORNE WEIGHT	22 kg
WEIGHT	0.2 kg

MOUNTS. STANDS

FONESTAR

Stand for lights with T bar and truss gantry for lights.



RL-401

CHARACTERISTICS	Stand for lights, with base with 3 folding legs. Upper bar: 35 mm. 1.2 m horizontal bar with 4 wing nuts. 30 cm between wing nuts. Manufactured in iron, black finish.
HEIGHT	Adjustable 146 to 317 cm
MAXIMUM BORNE WEIGHT	30 kg
WEIGHT	7.6 kg
ACCESSORIES	Nuts for fixing lights.

RL-420D

CHARACTERISTICS	Truss gantry for lights. 3 m truss manufactured with 35 mm Ø iron tubes. 2 stands with 3 folding legs. Manufactured in iron, black finish.
HEIGHT	Adjustable 146 to 317 cm
MAXIMUM BORNE WEIGHT	60 kg
WEIGHT	20 kg

